

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
11 January 2001 (11.01.2001)

PCT

(10) International Publication Number
WO 01/02189 A1

- (51) International Patent Classification⁷: **B42D 5/00** (74) Agents: **PETERS, Carolyn, V. et al.**; Office Of Intellectual Property Counsel, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).
- (21) International Application Number: **PCT/US00/14565**
- (22) International Filing Date: **25 May 2000 (25.05.2000)** (81) Designated States (*national*): **AU, CA, JP, KR, MX, US.**
- (25) Filing Language: **English** (84) Designated States (*regional*): **European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).**
- (26) Publication Language: **English**
- (30) Priority Data:
99113138.4 **6 July 1999 (06.07.1999) EP** Published:
— *With international search report.*
- (71) Applicant (*for all designated States except US*): **3M INNOVATIVE PROPERTIES COMPANY [US/US]; 3M Center, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).** *For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): **KRECKEL, Karl, W. [DE/DE]; Benzenbergweg 3, D-42781 Haan (DE).**

(54) Title: **NOTE PAD**

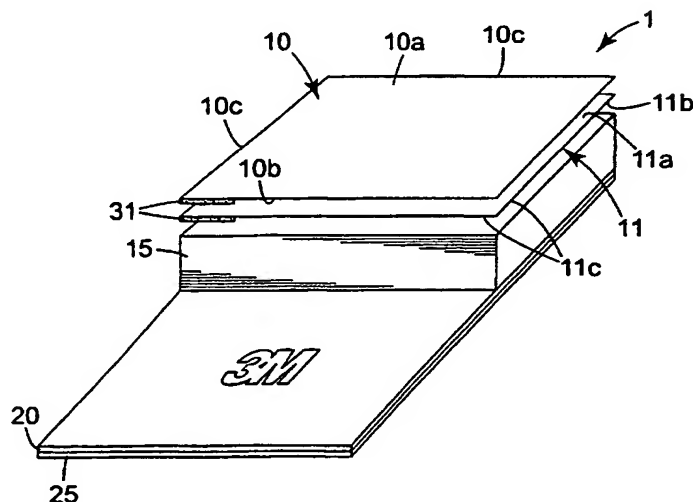

(57) Abstract: The invention refers to a note-pad (1) comprising a plurality of sheets of paper and a base sheet, each of said plurality of sheets of paper and the base sheet having a top face (10A, 11A), a bottom face (10B, 11B) and side edges (10C, 11C), the plurality of sheets and the base sheet being releasably adhered to each other, the top face (10A, 11A) of each of said plurality of sheets of paper being writable and the bottom face of said base sheet bearing an exposed skid-resistant layer having a thickness of less than 100 μm, a static coefficient of friction of at least 1 as measured according to DIN 53.375-B on a stainless steel surface using a static frictional weight of 200 g, and a 90° peel adhesion on a stainless steel surface of less than 0.1 N/1.27 cm as measured according to FINAT Test Method no. 2.

WO 01/02189 A1